



Hard As Nails®



Hard Film Floor Finish

This floor finish utilizes highly durable internally cross-linked polymers blended to achieve a harder floor finish film. Our unique chemistry results in a high gloss, long wearing finish that cures faster than any other metal-interlock finish. The perfect labor saving advantage for Educational and Retail facilities which have little or no time for floor burnishing. In addition, this finish resists initial scuffing and daily scuffing to further reduce floor maintenance costs.



Uses

- Resilient tile
- Terrazzo
- Marble

Features

- Superior wearing and non-scuffing.
- Self-leveling, self-sealing.
- Resists dirt embedment.

Maintenance

- Low - Medium


Directions For Use

Read the entire label before using this product.

Recommended for use on all types of resilient tile flooring and properly prepared hard surfaces. RESTORATIVE MAINTENANCE: Completely remove all old wax, finish and soil from floor surface following strip procedure instructions on stripper label. Floor surface must be clean, dry and free of residue before finish is applied. Rinse with clean water if necessary. Apply finish in uniform, thin to medium coats using a clean synthetic finish mop or applicator system. Allow each coat to dry thoroughly before applying additional coats, usually 20 - 30 minutes. Elevated temperatures and humidity may extend dry time. 4 - 5 coats of finish are recommended.

Note: This product is a self sealing finish, however, if tile is old, worn or porous, initially applying 1 - 2 coats of a sealer will enhance gloss and long term performance. ROUTINE MAINTENANCE: Sweep large debris and dust mop (using a water based treatment). Damp mop or automatic scrub using a neutral pH cleaner. Buff or burnish the floor as desired. The use of a cleaner/restorer is recommended to condition the floor and extend the time between top scrub and recoating. INTERIM MAINTENANCE: Sweep large debris and dust mop (using a water-based treatment). Top scrub the floor using a top scrub cleaner and recommended floor pad to remove the top soiled layers of finish. Floor surface must be clean, dry and free of residue before finish is applied. Apply 1 - 2 coats of finish as directed above. **Note: Slip resistance meets or exceeds (ASTM D 2047-04) James Machine 0.5 minimum.**

Koenig Pendulum Hardness Tester*

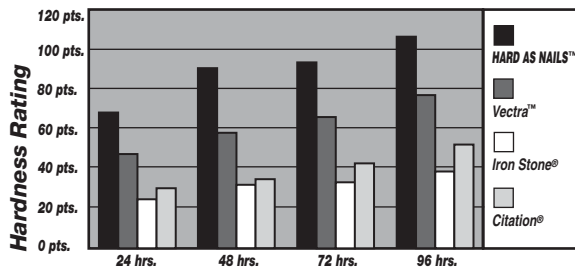

* This information is presented based on our research which we believe to be correct and objective. No guarantee is expressed or implied. Vectra™ is a trademark of SC Johnson. Iron Stone® is a registered trademark of Butcher's. Citation® is a registered trademark of Buckeye International, Inc.

Properties

Color (dried).....	Crystal clear
Color (liquid).....	White
Coverage.....	2000-3000 sq. ft./gallon
Dry time.....	20 - 30 minutes
Fragrance.....	Mild
Freeze/thaw stability.....	3 cycles
Gloss (ASTM D 1455).....	One coat 80 - 85 Two coats 85 - 90
Heel mark resistance.....	Excellent
Leveling.....	Excellent
pH.....	8.1 - 8.9
Powdering resistance.....	Excellent
Recoat.....	Excellent
Specific gravity.....	1.026
Recommended coats.....	4 - 6
Top scrub.....	2 - 3
Free styrene content.....	0.0
Shelf life.....	1 year

Authorized Betco Distributor

Safety

Keep out of reach of children. For institutional and commercial use. **WARNING: EYE IRRITANT. HARMFUL IF ABSORBED THROUGH SKIN.** May cause headache, dizziness or nausea. Wear safety glasses and impervious gloves such as Butyl Rubber. Use with adequate ventilation. Avoid contact with eyes, skin, and clothing. Wash thoroughly after handling. Keep closures tight and upright to prevent leakage. Keep container closed. In case of spillage, absorb and dispose of in accordance with local applicable regulations. **FIRST AID: IF ON SKIN OR CLOTHING:** Remove contaminated clothing, wash skin with soap and water. Seek medical attention if irritation persists. **IF IN EYES:** Rinse with gentle stream of water for 15 minutes. Seek medical attention. **IF INHALED:** Remove to fresh air. If not breathing, call 911 or ambulance, then administer artificial respiration. **IF SWALLOWED:** Contact a poison control center or doctor for treatment advice. Do NOT induce vomiting unless instructed to do so by poison control center or doctor.

Available In

- Case/4 - 1 Gallon (3.78 L): Item #65904-00
- Pail/5 Gallon (18.9 L): Item #65905-00
- Box/2-1.125 Gallon Bags (4.25 L): Item #65959-00 (QUICKCOAT®)
- Drum/55 Gallon (208 L): Item #65955-00

